

## Aluminum Capacitors Solid Axial




Fig. 1

QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Maximum case size (Ø D x L in mm)	6.7 x 15.3 to 12.9 x 32.0
Rated capacitance range (E6 series), C <sub>R</sub>	1.0 µF to 1000 µF
Tolerance on C <sub>R</sub>	± 20 %; ± 10 % on request
Rated voltage range, U <sub>R</sub>	6.3 V to 40 V
Category temperature range	- 55 °C to + 125 °C
Useable temperature range	- 80 °C to + 200 °C
Endurance test at 155 °C and 125 °C	5000 h and 8000 h
Useful life at 125 °C	20 000 h
Useful life at 40 °C, I <sub>R</sub> applied	450 000 h
Shelf life at 0 V, 125 °C	500 h
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	55/125/56

### FEATURES

- Polarized aluminum electrolytic capacitors, solid electrolyte MnO<sub>2</sub>
- Axial leads, aluminum case, ceramic seal, blue insulation sleeve
- SAL-A: standard version
- SAL-AG: epoxy filled shock-proof version up to 10 000 g
- Extremely long useful life: 20 000 h at 125 °C
- Extended high temperature range up to 200 °C
- Excellent low temperature impedance and ESR behaviour
- Charge and discharge proof, application with 0 Ω resistance allowed
- Reverse DC voltage up to 0.3 x U<sub>R</sub> allowed
- AC voltage up to 0.8 x U<sub>R</sub> allowed
- Advanced technology to achieve high reliability and high stability


**RoHS\***  
COMPLIANT

### Note

\* Pb containing terminations are not RoHS compliant, exemptions may apply

### APPLICATIONS

- EDP, telecommunication, industrial high temperature, automotive, military and space
- Smoothing, filtering, buffering, timing
- For power supplies, DC/DC converters


### MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in µF)
- Tolerance code on rated capacitance, code letter in accordance with IEC 60062 (M = ± 20 %, K = ± 10 %)
- Rated voltage (in V) at corresponding maximum temperature
- Date code in accordance with IEC 60062
- Name of manufacturer
- Code for factory of origin
- Band to indicate the negative terminal
- “+” sign to identify the positive terminal
- Series number

SELECTION CHART FOR C <sub>R</sub> , U <sub>R</sub> , AND RELEVANT MAXIMUM CASE SIZES (Ø D x L in mm)						
C <sub>R</sub> (µF)	U <sub>R</sub> (V) AT T <sub>amb</sub> = 85 °C					
	6.3	10	16	25	35	40
	U <sub>C</sub> (V) AT T <sub>amb</sub> = 125 °C					
	6.3	10	16	25	25	25
1.0	-	-	-	-	6.7 x 15.3	-
1.5	-	-	-	-	6.7 x 15.3	-
2.2	-	-	-	-	6.7 x 15.3	6.7 x 15.3
3.3	-	-	-	-	6.7 x 15.3	6.7 x 15.3
4.7	-	-	-	-	6.7 x 15.3	6.7 x 15.3
6.8	-	-	-	-	6.7 x 15.3	6.7 x 15.3
10	-	-	6.7 x 15.3	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4
15	-	-	6.7 x 15.3	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4

<b>SELECTION CHART FOR <math>C_R</math>, <math>U_R</math>, AND RELEVANT MAXIMUM CASE SIZES (<math>\varnothing D \times L</math> in mm)</b>						
$C_R$ ( $\mu F$ )	$U_R$ (V) AT $T_{amb} = 85^\circ C$					
	6.3	10	16	25	35	40
	$U_C$ (V) AT $T_{amb} = 125^\circ C$					
	6.3	10	16	25	25	25
22	-	-	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4	9.4 x 23.3
33	-	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4	9.4 x 23.3	9.4 x 23.3
47	6.7 x 15.3	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4	9.4 x 23.3	10.3 x 32.0
68	6.7 x 15.3	7.6 x 20.4	7.6 x 20.4	9.4 x 23.3	10.3 x 32.0	10.3 x 32.0
100	-	7.6 x 20.4	9.4 x 23.3	9.4 x 23.3	12.9 x 32.0	12.9 x 32.0
150	7.6 x 20.4	9.4 x 23.3	9.4 x 23.3	10.3 x 32.0	12.9 x 32.0	-
220	-	9.4 x 23.3	10.3 x 32.0	12.9 x 32.0	-	-
330	9.4 x 23.3	10.3 x 32.0	10.3 x 32.0	-	-	-
470	-	10.3 x 32.0	12.9 x 32.0	-	-	-
680	10.3 x 32.0	12.9 x 32.0	-	-	-	-
1000	12.9 x 32.0	12.9 x 32.0	-	-	-	-

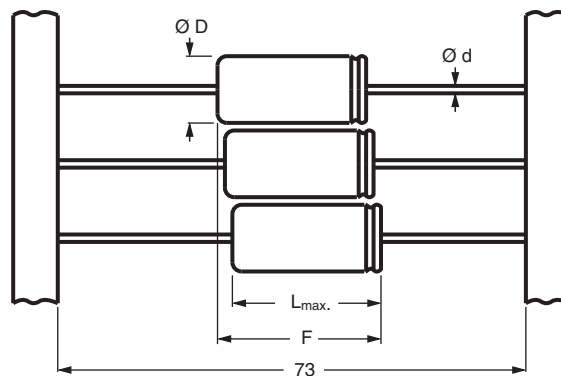**DIMENSIONS in millimeters AND AVAILABLE FORMS**


BA: taped in box (ammopack)  
BR: taped on reel

Fig. 2 - Forms: BA and BR

Table 1

<b>DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES</b>						
CASE		$F_{max.}$	$\varnothing d$	MASS <sup>(2)</sup> (g)	PACKAGING QUANTITIES	
MAXIMUM SIZE $\varnothing D \times L$ <sup>(1)</sup>	CODE				FORM BA	FORM BR
6.7 x 15.3	1	20.0	0.6	≈ 1.05	100	800
7.6 x 20.4	2A	22.5	0.6	≈ 1.55	100	800
9.4 x 23.3	4	25.0	0.6	≈ 2.60	100	500
10.3 x 32.0	5	35.0	0.8	≈ 4.20	100	500
12.9 x 32.0	6	35.0	0.8	≈ 7.00	100	400

**Notes**

- (1) For epoxy-filled versions add 1 mm to stated  $L_{max.}$ .
  - (2) Add 10 % for SAL-AG epoxy-filled versions.
- Detailed tape dimensions see section "PACKAGING".



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C <sub>R</sub>	Rated capacitance at 100 Hz
I <sub>R</sub>	Max. RMS ripple current, no necessary DC voltage applied
I <sub>L5</sub>	Max. leakage current after 5 min at U <sub>R</sub>
tan δ	Max. dissipation factor at 100 Hz
ESR	Max./typ. equivalent series resistance at 100 Hz
Z	Max. impedance at 100 kHz

**Note**

- Unless otherwise specified, all electrical values in Table 2 apply at T<sub>amb</sub> = 20 to 25 °C, P = 86 to 106 kPa, RH = 45 to 75 %.

**Table 2**

ELECTRICAL DATA AND ORDERING INFORMATION for 123 series															
U <sub>C</sub> (V)	U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (µF)	MAX. CASE SIZE Ø D x L (mm)	I <sub>R</sub> 100 Hz 125 °C (mA)	I <sub>R</sub> 10 kHz 85 °C (mA)	I <sub>R</sub> 100 kHz 40 °C (mA)	I <sub>L5</sub> 5 min (µA)	tan δ 100 Hz	MAX. ESR 100 Hz (Ω)	TYP. ESR 100 Hz (Ω)	Z 100 kHz (Ω)	ORDERING CODE			
												MAL2123....E3 LEAD (Pb)-FREE		MAL2123 .... NON LEAD (Pb)-FREE	
												SAL-A FORM BA TOL. ± 20 %	SAL-A FORM BR TOL. ± 20 %	SAL-AG (1) FORM BA TOL. ± 10 % LEVEL S	SAL-AG (1) FORM BA TOL. ± 20 %
6.3	6.3	47	6.7 x 15.3	58	440	640	15	0.18	7.6	3.0	1.2	13479	23479	83479	63479
		68	6.7 x 15.3	83	520	760	21	0.18	5.3	2.6	1.2	13689	23689	83689	63689
		150	7.6 x 20.4	160	870	1270	47	0.18	2.4	1.5	1.0	13151	23151	83151	63151
		330	9.4 x 23.3	330	1470	2140	104	0.18	1.1	0.55	0.4	13331	23331	83331	63331
		680	10.3 x 32.0	680	2340	3410	214	0.18	0.55	0.28	0.3	13681	23681	83681	63681
		1000	12.9 x 32.0	940	3180	4640	315	0.18	0.36	0.19	0.2	13102	23102	83102	63102
10	10	33	6.7 x 15.3	63	360	530	17	0.18	11	3.8	1.2	14339	24339	84339	64339
		47	6.7 x 15.3	83	440	640	24	0.18	7.6	4.0	1.2	14479	24479	84479	64479
		68	7.6 x 20.4	110	590	850	34	0.18	5.3	2.5	1.0	14689	24689	84689	64689
		100	7.6 x 20.4	160	710	1040	50	0.18	3.6	1.8	1.0	14101	24101	84101	64101
		150	9.4 x 23.3	240	990	1450	75	0.18	2.4	0.9	0.4	14151	24151	84151	64151
		220	9.4 x 23.3	350	1180	1720	110	0.18	1.7	0.6	0.4	14221	24221	84221	64221
		330	10.3 x 32.0	490	1650	2410	165	0.18	1.1	0.45	0.3	14331	24331	84331	64331
		470	10.3 x 32.0	570	1940	2830	235	0.18	0.8	0.35	0.3	14471	24471	84471	64471
		680	12.9 x 32.0	760	2580	3750	340	0.18	0.55	0.25	0.2	14681	24681	84681	64681
		1000	12.9 x 32.0	1000	3380	4920	500	0.18	0.36	0.18	0.2	14102	24102	84102	64102
16	16	10	6.7 x 15.3	31	230	330	16	0.14	28	8.0	2.5	15109	25109	85109	65109
		15	6.7 x 15.3	47	280	400	24	0.14	19	5.5	2.5	15159	25159	85159	65159
		22	6.7 x 15.3	63	340	490	35	0.14	13	5.5	2.5	15229	25229	85229	65229
		33	7.6 x 20.4	89	470	680	55	0.14	8.4	3.0	2.0	15339	25339	85339	65339
		47	7.6 x 20.4	120	560	810	75	0.14	5.9	2.6	2.0	15479	25479	85479	65479
		68	7.6 x 20.4	180	670	970	110	0.14	4.1	2.5	2.0	15689	25689	85689	65689
		100	9.4 x 23.3	260	920	1340	160	0.14	2.8	1.5	0.8	15101	25101	85101	65101
		150	9.4 x 23.3	310	1060	1550	240	0.16	2.1	0.7	0.8	15151	25151	85151	65151
		220	10.3 x 32.0	420	1420	2060	350	0.16	1.5	0.55	0.6	15221	25221	85221	65221
		330	10.3 x 32.0	510	1740	2530	500	0.16	1.0	0.35	0.6	15331	25331	85331	65331
470	12.9 x 32.0	680	2280	3330	750	0.16	0.7	0.25	0.4	15471	25471	85471	65471		
25	25	10	6.7 x 15.3	43	230	330	25	0.14	28	13.0	5	16109	26109	86109	66109
		15	6.7 x 15.3	60	280	400	35	0.14	19	10.0	5.0	16159	26159	86159	66159
		22	7.6 x 20.4	88	370	550	55	0.14	13	7	2.5	16229	26229	86229	66229
		33	7.6 x 20.4	130	470	680	85	0.14	8.4	5	2.5	16339	26339	86339	66339
		47	7.6 x 20.4	160	560	810	100	0.14	5.9	3.5	2.5	16479	26479	86479	66479
		68	9.4 x 23.3	230	760	1110	170	0.14	4.1	1.8	1.0	16689	26689	86689	66689
		100	9.4 x 23.3	250	860	1250	250	0.16	3.2	1.0	1.0	16101	26101	86101	66101
		150	10.3 x 32.0	350	1200	1740	400	0.16	2.1	1.2	0.8	16151	26151	86151	66151
220	12.9 x 32.0	460	1560	2270	550	0.16	1.5	0.85	0.6	16221	26221	86221	66221		



ELECTRICAL DATA AND ORDERING INFORMATION for 123 series															
U <sub>C</sub> (V)	U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (μF)	MAX. CASE SIZE Ø D x L (mm)	I <sub>R</sub> 100 Hz 125 °C (mA)	I <sub>R</sub> 10 kHz 85 °C (mA)	I <sub>R</sub> 100 kHz 40 °C (mA)	I <sub>L5</sub> 5 min (μA)	tan δ 100 Hz	MAX. ESR 100 Hz (Ω)	TYP. ESR 100 Hz (Ω)	Z 100 kHz (Ω)	ORDERING CODE			
												MAL2123.....E3 LEAD (Pb)-FREE MAL2123 ..... NON LEAD (Pb)-FREE			
												SAL-A FORM BA TOL. ± 20 %	SAL-A FORM BR TOL. ± 20 %	SAL-AG <sup>(1)</sup> FORM BA TOL. ± 10 % LEVEL S	SAL-AG <sup>(1)</sup> FORM BA TOL. ± 20 %
25	35	1.0	6.7 x 15.3	4	55	80	5	0.12	240	105	16.5	10108	20108	80108	60108
		1.5	6.7 x 15.3	7	68	98	5	0.12	160	40.60	11.0	10158	20158	80158	60158
		2.2	6.7 x 15.3	10	82	120	5	0.12	109	30	7.5	10228	20228	80228	60228
		3.3	6.7 x 15.3	14	100	150	7	0.12	73	28	7.5	10338	20338	80338	60338
		4.7	6.7 x 15.3	20	120	170	10	0.12	51	20	7.5	10478	20478	80478	60478
		6.8	6.7 x 15.3	27	140	210	15	0.12	35	16	7.5	10688	20688	80688	60688
		10	7.6 x 20.4	37	200	280	20	0.12	24	10	2.5	10109	20109	80109	60109
		15	7.6 x 20.4	53	240	350	30	0.12	16	8	2.5	10159	20159	80159	60159
		22	7.6 x 20.4	78	290	420	45	0.12	11	7	2.5	10229	20229	80229	60229
		33	9.4 x 23.3	120	410	590	65	0.12	7.2	3	1.0	10339	20339	80339	60339
		47	9.4 x 23.3	140	480	700	95	0.12	5.1	2.9	1.0	10479	20479	80479	60479
		68	10.3 x 32.0	170	570	820	135	0.16	4.7	2.1	0.8	10689	20689	80689	60689
		100	12.9 x 32.0	220	760	1100	200	0.16	3.2	1.7	0.6	10101	20101	80101	60101
		150	12.9 x 32.0	290	990	1440	300	0.16	2.1	1.0	0.6	10151	20151	80151	60151
		25	40	2.2	6.7 x 15.3	11	82	120	9	0.12	109	38	7.5	17228	27228
3.3	6.7 x 15.3			16	100	150	13	0.12	73	25	7.5	17338	27338	87338	67338
4.7	6.7 x 15.3			22	120	170	19	0.12	51	20	7.5	17478	27478	87478	67478
6.8	6.7 x 15.3			28	140	210	27	0.12	35	15	7.5	17688	27688	87688	67688
10	7.6 x 20.4			41	200	280	40	0.12	24	11	2.5	17109	27109	87109	67109
15	7.6 x 20.4			61	240	350	60	0.12	16	7	2.5	17159	27159	87159	67159
22	9.4 x 23.3			89	330	480	90	0.12	11	4	1.5	17229	27229	87229	67229
33	9.4 x 23.3			120	410	590	130	0.12	7.2	2.9	1.0	17339	27339	87339	67339
47	10.3 x 32.0			160	540	790	190	0.12	5.1	2.7	1.0	17479	27479	87479	67479
68	10.3 x 32.0			170	570	820	270	0.16	4.7	2.3	0.8	17689	27689	87689	67689
100	12.9 x 32.0			220	760	1100	400	0.16	3.2	1.6	0.6	17101	27101	87101	67101

Note

(1) SAL-AG types are epoxy-filled.

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
<b>Voltage</b>		
Surge voltage		$U_s \leq 1.15 \times U_R$
Reverse voltage		$U_{rev} < 0.3 \times U_R$
Maximum peak AC voltage, reverse voltage applied		$\leq 2 \text{ V}$
Maximum peak AC voltage, without reverse voltage applied	$T_{amb} \leq 85 \text{ °C}$ at: f ≤ 0.1 Hz 0.1 Hz < f ≤ 1 Hz 1 Hz < f ≤ 10 Hz 10 Hz < f ≤ 50 Hz f > 50 Hz	0.30 x U <sub>R</sub> 0.45 x U <sub>R</sub> 0.60 x U <sub>R</sub> 0.65 x U <sub>R</sub> 0.80 x U <sub>R</sub>
	$85 \text{ °C} < T_{amb} \leq 125 \text{ °C}$ at: f ≤ 0.1 Hz 0.1 Hz < f ≤ 1 Hz 1 Hz < f ≤ 10 Hz 10 Hz < f ≤ 50 Hz f > 50 Hz	0.15 x U <sub>R</sub> 0.22 x U <sub>R</sub> 0.30 x U <sub>R</sub> 0.32 x U <sub>R</sub> 0.40 x U <sub>R</sub>
<b>Current</b>		
Maximum leakage current	After 5 min at U <sub>R</sub> and T <sub>amb</sub> = 25 °C	$I_{L5} \leq 0.05 C_R \times U_R$ or 2 μA, whichever is greater; see Table 2
Typical leakage current	After 15 s at U <sub>R</sub> and T <sub>amb</sub> = 25 °C: U <sub>R</sub> = 6.3 V to 16 V U <sub>R</sub> = 25 V to 40 V	≈ 0.2 x value stated in Table 2 ≈ 0.1 x value stated in Table 2

**VOLTAGE**

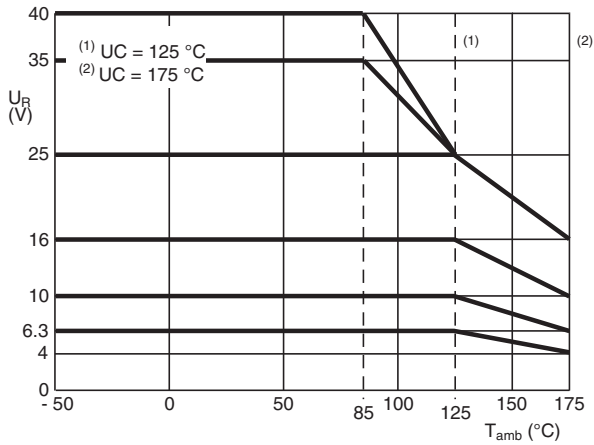


Fig. 3 - Maximum permissible voltage up to 175 °C

**RIPPLE CURRENT (IR)**

PARAMETER	T <sub>amb</sub>					
	25 °C	40 °C	65 °C	85 °C	105 °C	125 °C
I <sub>R</sub> multiplier	1.1	1.0	0.88	0.75	0.59	0.37

**Notes**

- (1) Applying the maximum RMS ripple current given in Table 2 will cause a device temperature of 138 °C.
- (2) The 100 kHz values in Table 2 for other temperatures are to be calculated with the above I<sub>R</sub> multipliers.

**LEAKAGE CURRENT**

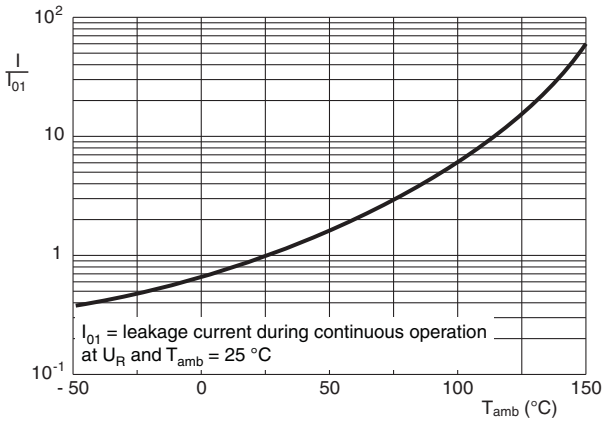


Fig. 4 - Typical multiplier of leakage current as a function of ambient temperature

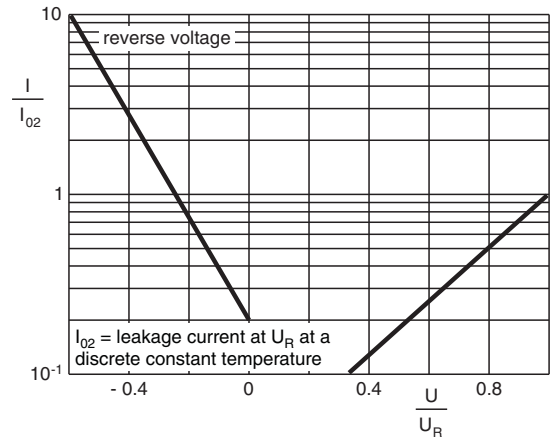


Fig. 5 - Typical multiplier of leakage current as a function of U/UR

**CAPACITANCE (C)**

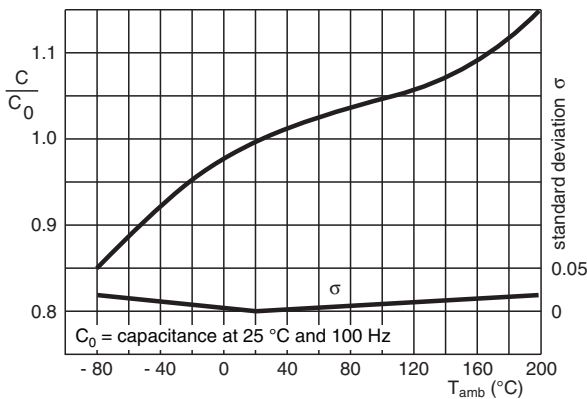


Fig. 6 - Typical multiplier of capacitance as a function of ambient temperature

**DISSIPATION FACTOR (tan δ)**

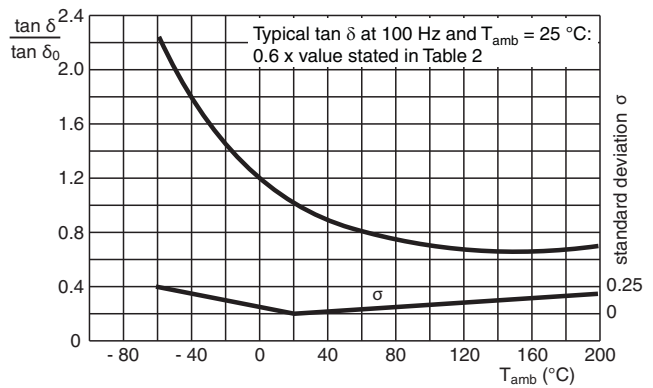
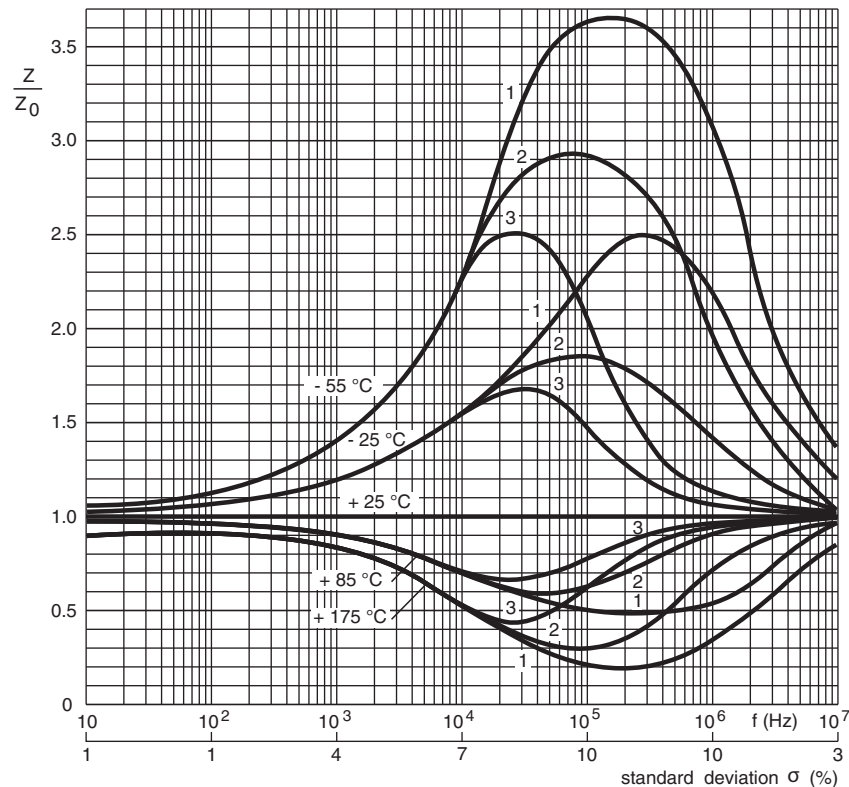


Fig. 7 - Typical multiplier of dissipation factor as a function of ambient temperature

MAXIMUM POWER DISSIPATION	
MAXIMUM CASE SIZE Ø D x L (mm)	$P_{max.} = P_{125}$ (W)
6.7 x 15.3	0.13
7.6 x 20.4	0.16
9.4 x 23.3	0.21
10.3 x 32.0	0.26
12.9 x 32.0	0.32

EQUIVALENT SERIES INDUCTANCE (ESL), $f = 10 \text{ MHz}$			
MAXIMUM CASE SIZE Ø D x L (mm)	PITCH (mm)	MAX. ESL (nH)	TYP. ESL (nH)
6.7 x 15.3	20.3	30	15 to 23
7.6 x 20.4	25.4	30	16 to 24
9.4 x 23.3	27.9	35	20 to 27
10.3 x 32.0	35.6	40	26 to 33
12.9 x 32.0	35.6	55	32 to 49

**IMPEDANCE (Z)**

 Typical impedance at 100 kHz and  $T_{amb} = 25 \text{ °C}$ : 0.5 x value stated in Table 2.


Curve 1: Case Ø D x L = 6.7 mm x 15.3 mm and 7.6 mm x 20.4 mm; 16 V to 40 V  
 Curve 2: Case Ø D x L = 6.7 mm x 15.3 mm and 7.6 mm x 20.4 mm; 6.3 V to 10 V  
 Curve 3: Case Ø D x L = 9.4 mm x 32.0 mm, 10.3 mm x 32.0 mm and 12.9 mm x 32.0 mm  
 $Z_0$  = Initial impedance value at any frequency and  $T_{amb} = 25 \text{ °C}$

Fig. 8 - Typical multiplier of impedance as a function of frequency at different ambient temperatures

**IMPEDANCE (Z)**

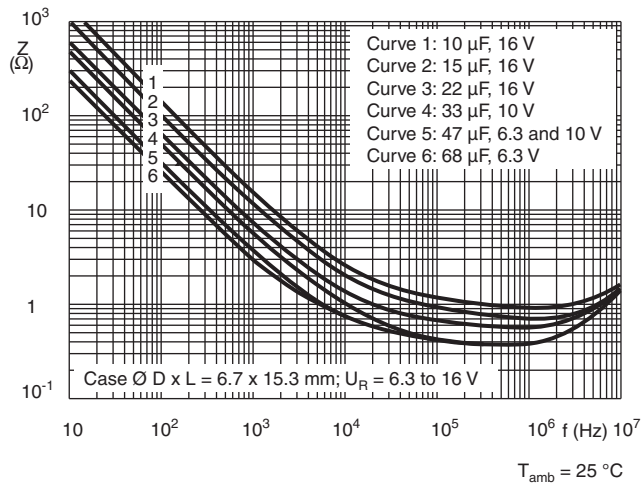


Fig. 9 - Typical impedance as a function of frequency

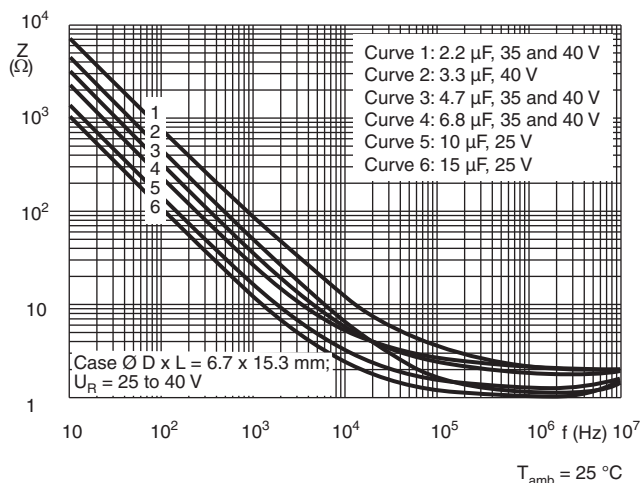


Fig. 10 - Typical impedance as a function of frequency

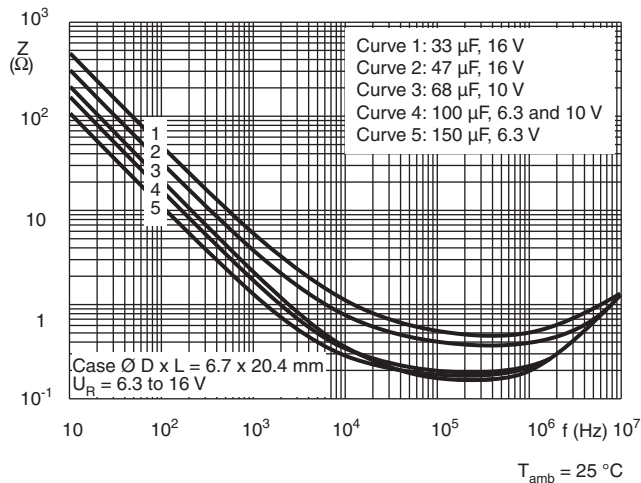


Fig. 11 - Typical impedance as a function of frequency

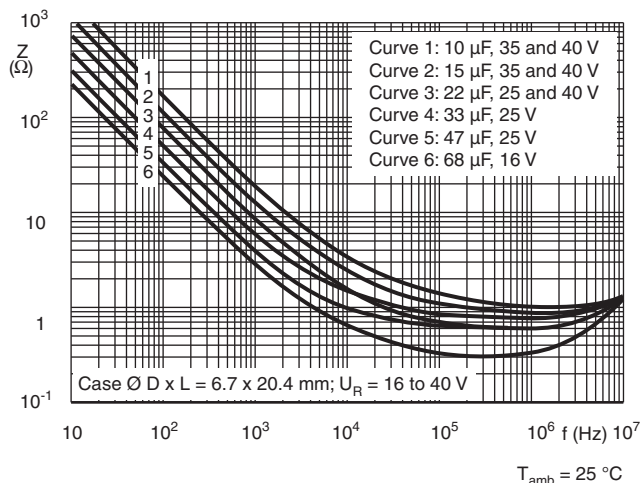


Fig. 12 - Typical impedance as a function of frequency

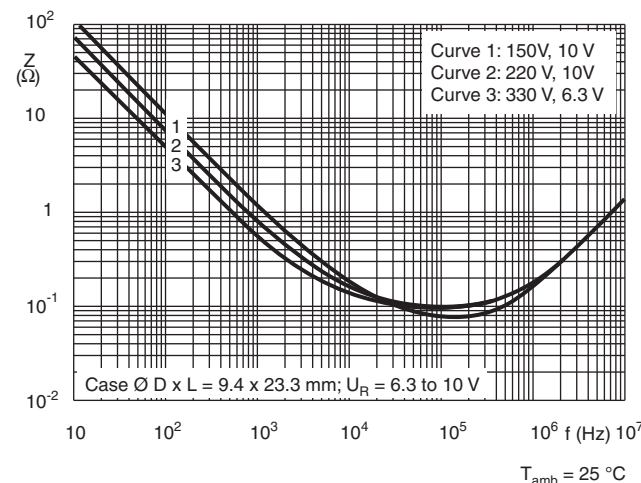


Fig. 13 - Typical impedance as a function of frequency

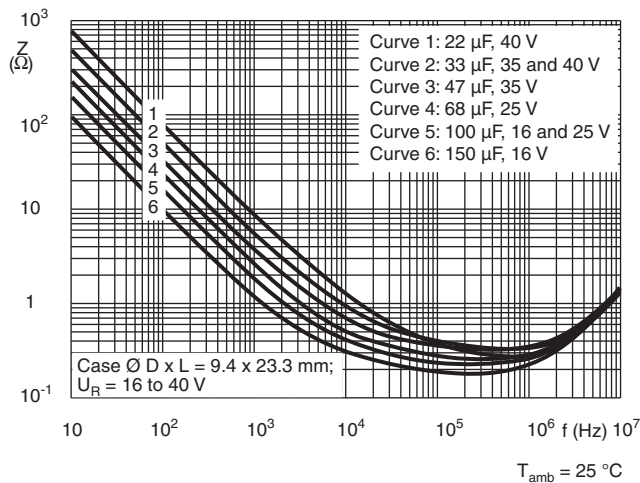


Fig. 14 - Typical impedance as a function of frequency

**IMPEDANCE (Z)**

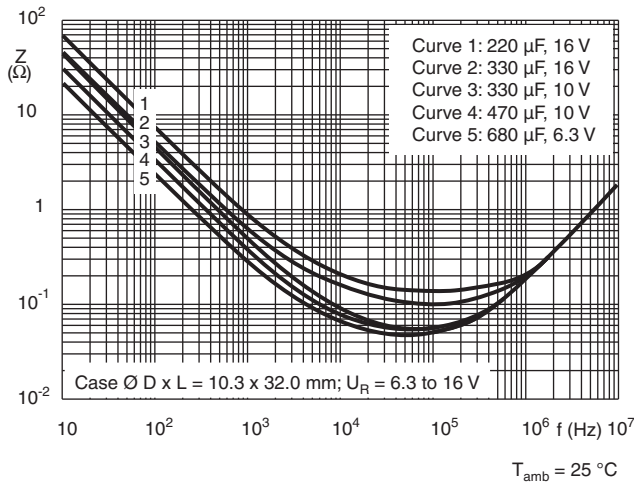


Fig. 15 - Typical impedance as a function of frequency

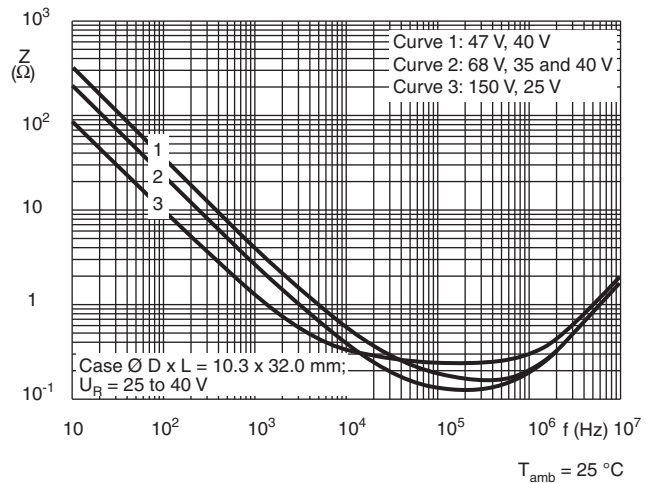


Fig. 16 - Typical impedance as a function of frequency

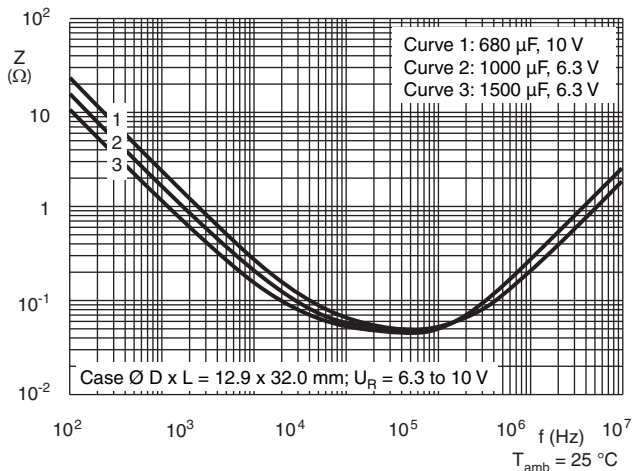


Fig. 17 - Typical impedance as a function of frequency

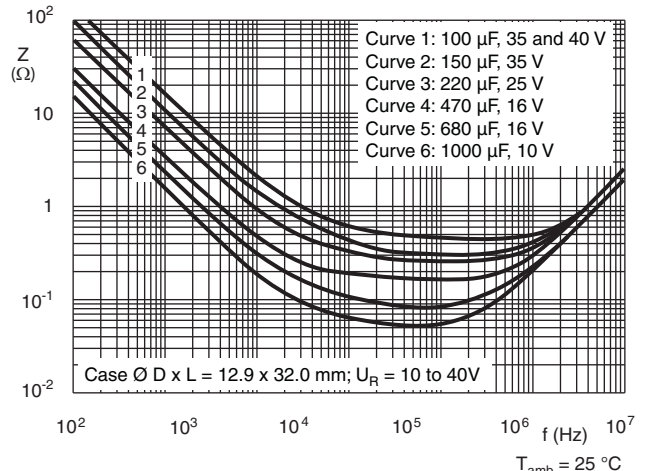


Fig. 18 - Typical impedance as a function of frequency

**EQUIVALENT SERIES RESISTANCE (ESR)**

Typical ESR: see Figures 20 to 28; the standard deviation is 20 % of each value.

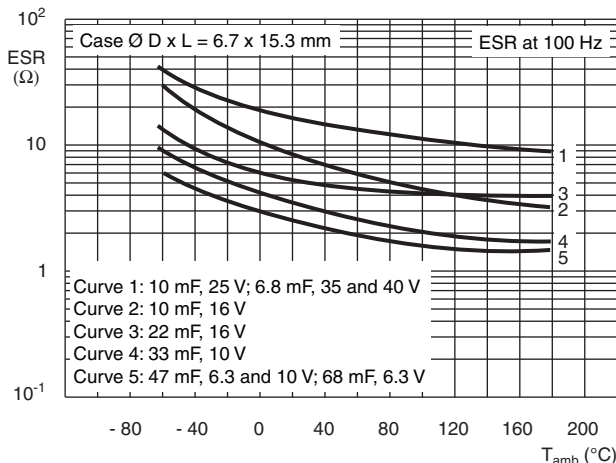


Fig. 19 - Typical ESR as a function of ambient temperature

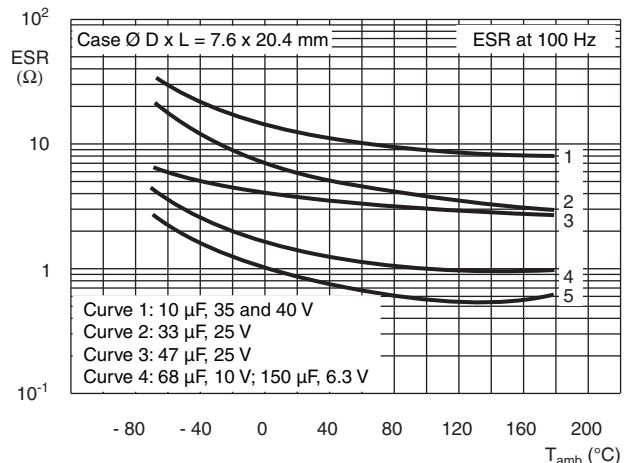


Fig. 20 - Typical ESR as a function of ambient temperature



**EQUIVALENT SERIES RESISTANCE (ESR)**

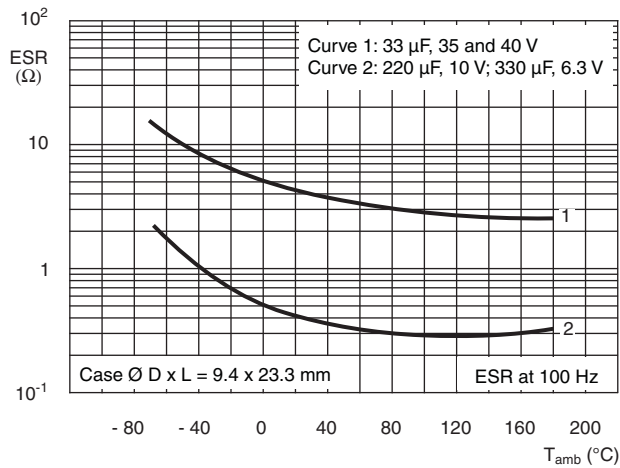


Fig. 21 - Typical ESR as a function of ambient temperature

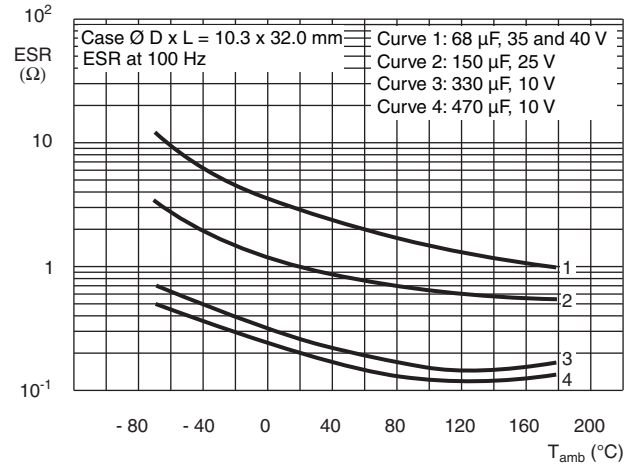


Fig. 22 - Typical ESR as a function of ambient temperature

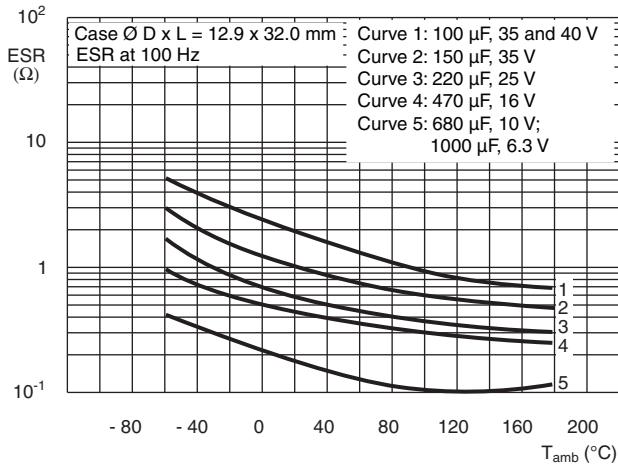


Fig. 23 - Typical ESR as a function of ambient temperature

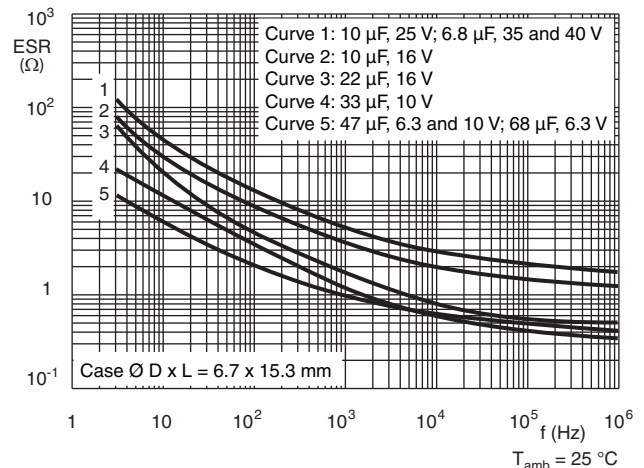


Fig. 25 - Typical ESR as a function of frequency

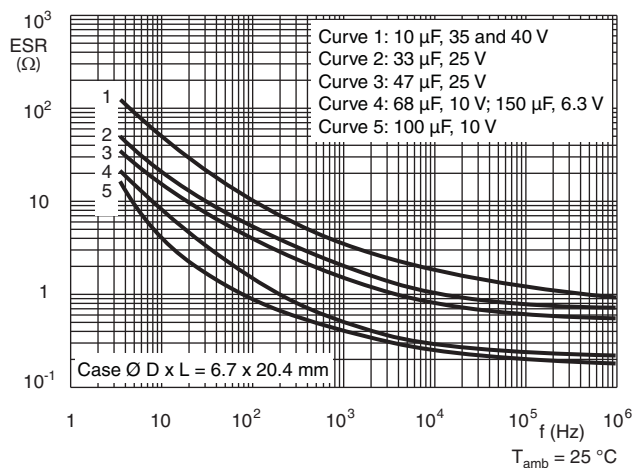


Fig. 24 - Typical ESR as a function of frequency

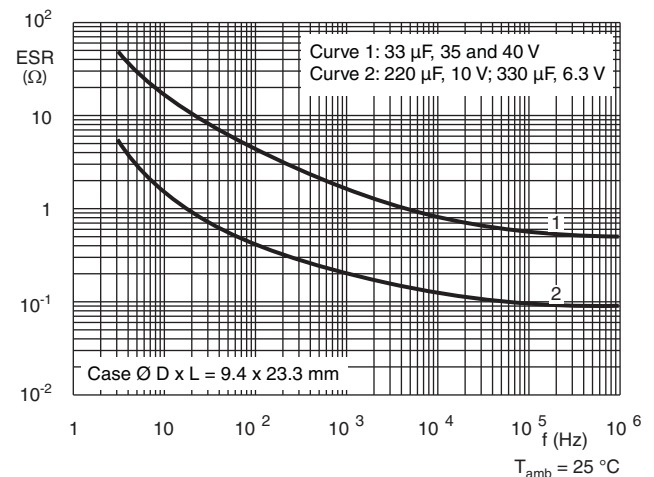


Fig. 26 - Typical ESR as a function of frequency

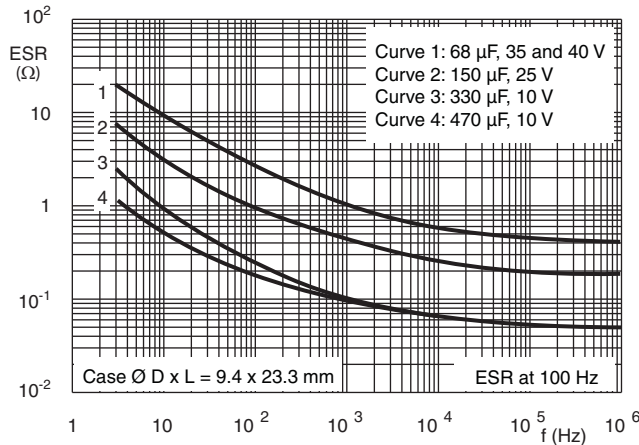
**EQUIVALENT SERIES RESISTANCE (ESR)**


Fig. 27 - Typical ESR as a function of ambient temperature

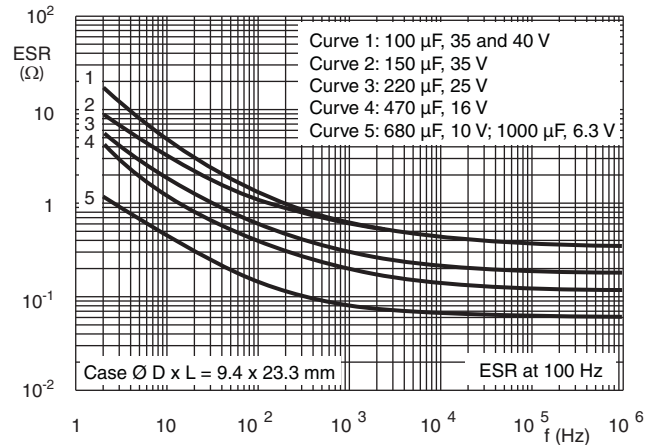


Fig. 28 - Typical ESR as a function of ambient temperature

**Table 3**

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 125\text{ °C}$ ; $U_R = 6.3\text{ V}$ to 25 V with $U_R$ applied; $U_R = 35\text{ V}$ and 40 V with $U_C$ applied; 10 000 h	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30302 subclause 1.8.1	$T_{amb} = 125\text{ °C}$ ; $I_R$ applied and $U_R = 6.3\text{ V}$ to 25 V with $U_R$ applied; $U_R = 35\text{ V}$ and 40 V with $U_C$ applied; 20 000 h	$\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $Z \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: < 1 %
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 125\text{ °C}$ ; no voltage applied; 500 h	$\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1 \times \text{spec. limit}$
Charge and discharge	IEC 60384-4-2 subclause 9.21	10 <sup>6</sup> cycles without series resistance: 0.5 s to $U_R$ ; 0.5 s to ground	$\Delta C/C: \pm 5\%$ no short or open circuit, no visible damage
Shock	IEC 60068-2-27 test Ea	Half-sine or saw tooth pulse shape; 50 g; 11 ms; 3 successive shocks in each direction of 3 mutually perpendicular axes; no voltage applied	no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$
Severe rapid change of temperature		100 cycles of 1 h duration, each with 30 min at - 40 °C and + 125 °C	$\Delta C/C: \pm 25\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $Z \leq 2.0 \times \text{spec. limit}$ $I_{L5} \leq 1 \times \text{spec. limit}$
Solvent resistance	IEC 60068-2-45, test XA IEC 60653	Immersion: 5 min $\pm$ 0.5 min with or without ultrasonic at 55 °C $\pm$ 5 °C Solvents: demineralized water and/or calgonite solution (20 g/l)	Visual appearance not affected
Passive flammability	IEC 60695-2-2	Capacitor mounted to a vertical printed-circuit board, one flame on capacitor body; $T_{amb} = 20\text{ °C}$ to 25 °C; test duration = 20 s	After removing the test flame from the capacitor, the capacitor must not continue to burn for more than 15 s; no burning particles must drop from the sample



**ADDITIONAL TESTS AND REQUIREMENTS FOR EPOXY-FILLED VERSIONS SAL-AG**

2281 123 8.... Form BA ± 10 %, level S, lead (Pb)-free

2222 123 8.... Form BA ± 10 %, level S, non lead (Pb)-free

Table 4

TEST PROCEDURES AND REQUIREMENTS			
TEST	PROCEDURE	REQUIREMENTS	
<b>Severe vibration tests in accordance with "IEC 60068-2-6" and "MIL STD-202", method 204, letter E, with the following details and additions</b>			
Method of mounting: Severity 1  Severity 2 Severity 1 and 2	Clamping both body and leads Frequency range temperature 10 Hz to 3000 Hz; 20 °C to 25 °C  Frequency range temperature 50 Hz to 2000 Hz; 125 °C vibration amplitude: 50 g or 3.5 mm, whichever is less	$\Delta C/C: \pm 10 \%$ $\tan \delta \leq 1.2 \times \text{stated limit}$ $Z \leq 1.4 \times \text{stated limit}$ DC leakage current: $\leq$ stated limit no intermittent contacts no indication of breakdown no open circuiting no evidence of mechanical damage	
Direction and duration of motion: Severity 1  Severity 2	1 octave/min; 3 directions (mutually perpendicular); 20 sweeps per direction (total 60 sweeps or 18 h)  1 octave/min; 2 directions (longitudinal and transversal); 3 sweeps per direction (total 6 sweeps or 1 h)		
Functioning: Severity 1 Severity 2	Rated voltage applied No voltage applied		
Typical capability	> 80 g at 10 Hz to 3000 Hz (also at 125 °C)		
<b>Severe shock tests in accordance with "IEC 60068-2-27" and "MIL STD-202", method 213, letter F, with the following details and additions</b>			
Method of mounting	Clamping both body and leads		$\Delta C/C: \pm 10 \%$ $\tan \delta \leq 1.2 \times \text{stated limit}$ $Z \leq 1.4 \times \text{stated limit}$ DC leakage current: $\leq$ stated limit no intermittent contacts no indication of breakdown no open circuiting no evidence of mechanical damage
Pulse shape: Severity 1 Severity 2 Severity 3	Half-sine or sawtooth 1500 g; 0.5 ms ("MIL STD-202", method 213, letter F) 3000 g; 0.2 ms 10 000 g; 0.1 ms		
Direction and number of shocks: Severity 1 and 2  Severity 3	3 successive shocks in each direction of 3 mutually perpendicular axes (total 18 shocks)  1 shock in any direction		
Functioning	Rated voltage applied		



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.