


SRM Surge Resistant MELF Resistor

Quality • Reliability
Cost-Down via Innovation.

SRM

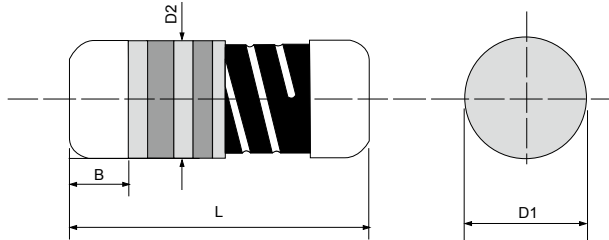

Specifications Per

- IEC 60115-1

Features

- IEC60065 & UL1676 Compliant
- MELF packaging yet capable of high power handling
- Special conductive film enhances anti-surge capability.
- Absorbs harmful surge which damages precious devices or components.
- SMD-enabled alternative to carbon composition resistors
- Approved to the safety requirement of VDE0860 under license number 40043961
- Products meet RoHS requirements and do not contain substances of very high concern identified by European Chemicals Agency

DIMENSIONS

Type	Body Length (L, mm)	Cap Diameter (D1, mm)	Body Diameter (D2, mm)	Soldering Spot (B, mm)	Net Weight Per 1000 pcs
SRM204	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/ -0.15	0.6 Min.	17 grams
SRM204T	3.52 ± 0.15	1.35 ± 0.1	D1+0.02/ -0.15	0.6 Min.	17 grams
SRM207	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	66 grams
SRM207P	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	66 grams
SRM101	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	66 grams
SRM101T	5.90 ± 0.20	2.20 ± 0.1	D1+0.02/ -0.2	1.0 Min.	66 grams
SRM201	8.50 ± 0.50	3.00 ± 0.2	D1+0.05/ -0.35	1.3 Min.	186 grams
SRM301	10.5 ± 0.50	4.00 ± 0.5	D1+0.05/ -0.45	1.6 Min.	446 grams

GENERAL SPECIFICATIONS

Type	Power Rating (at 70°C)	Maximum Working Voltage	Maximum Permissible Surge Voltage	Minimum Resistance	Maximum Resistance	Resistance Tolerance	Available Resistance Values
SRM204	1/4W	400V	2,000V	1Ω	1MΩ	±1%~±5%	E-24/E-96
SRM204T	1/2W	450V	4,000V	1Ω	10MΩ	±1%~±5%	E-24/E-96
SRM207	1/2W	600V	6,000V	1Ω	2M2Ω	±1%~±5%	E-24/E-96
SRM207P	1/2W	600V	8,000 V	0.1Ω	2M2Ω	±1%~±5%	E-24/E-96
SRM101	1W	600V	8,000 V	0.1Ω	2M2Ω	±1%~±5%	E-24/E-96
SRM101T	1W	600V	10,000 V	0.1Ω	2M2Ω	±1%~±5%	E-24/E-96
SRM201	2W	700V	9,000V	0.1Ω	2M2Ω	±1%~±5%	E-24/E-96
SRM301	3W	800V	10,000V	0.1Ω	2M2Ω	±1%~±5%	E-24/E-96

Special sizes, values, and specifications not listed available on special order.
For resistance values outside the specified ranges, please contact us.

SRM Surge Resistant MELF Resistor

Quality • Reliability
Cost-Down via Innovation.

■ PART NUMBER

Example: SRM204TF16R2TKZTR3K0

SRM204T	F	16R2	TKZ	TR3K0
Type	Tolerance*	Resistance	TCR	Packaging
	F (1%) G (2%) J (5%)	16.2Ω 4-character code containing - 3 significant digits 1 letter multiplier <u>MULTIPLIER</u> R = 1 K = 10 ³ M = 10 ⁶ G = 10 ⁹	3-character code TKZ = Default Product Temperature Coefficient. Information of typical product temperature coefficient can be found in the Technical Summary section of the datasheet.**	5-character code TR = Tape Reel (pieces per reel) <u>SRM204/SRM204T</u> 3K0 = 3,000 6K0 = 6,000*** 10K = 10,000*** <u>SRM207/SRM207P</u> <u>SRM101/SRM101T</u> 2K0 = 2,000 6K0 = 6,000*** 10K = 10,000*** <u>SRM201</u> 2K5 = 2,500 <u>SRM301</u> 2K0 = 2,000


SRM

* Listed values may not be applicable across product types or to all resistance values. Please check with us before placing order.

** For the availabilities of non-default temperature coefficient, please check with us. Reference for TCR letter codes can be found in section (4) of Part Number Construction in the Appendices.

*** upon request

■ POWER DERATING CURVE

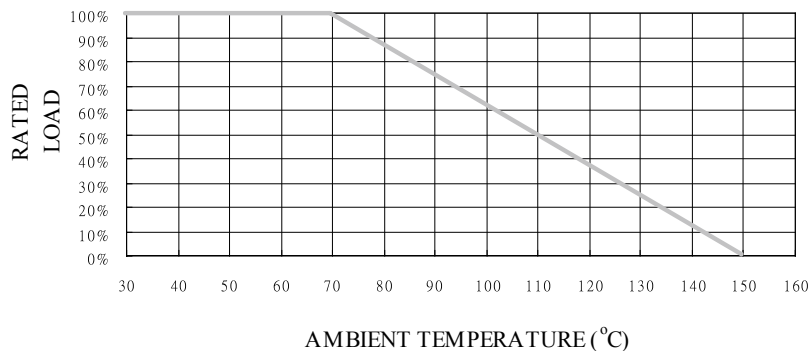

■ TECHNICAL SUMMARY

Characteristics	Ranges & Limits	
Dielectric Withstanding Voltage, VAC or DC	SRM204T SRM204/207/207P/101 SRM201/101T SRM301	300 350 500 800
Temperature Coefficient, PPM / °C*	±100, ±200, ±400	
Operating Temperature Range, °C	-55 ~ +150	
Insulation Resistance, MΩ	>10 ⁴	
Tin Whisker (JESD201 Temperature Cycling & High Temp. /Humidity Storage), μm	<5	







* Not applicable to all resistance values. Please check with us regarding the PPM of specific resistance value(s).

PERFORMANCE SPECIFICATIONS

Characteristics	Test Conditions	Limits													
Short Time Overload	IEC 60115-1 4.13 2 seconds 2.5x rated voltage (not over max. working voltage)	±2%													
Load Life In Humidity	IEC 60115-1 4.24 56 days rated load (not over max. working voltage) at (40±2)°C and (93±3)% relative humidity	±5%													
Load Life 1,000 hours	IEC 60115-1 4.25.1 Rated load (not over max. working voltage) with 1.5 hours ON, 0.5 hours OFF, at (70±2)°C	±5%													
Periodic Electric Overload	IEC 60115-1 4.39 3.9x rated voltage (not over 2X max. working voltage) with 0.1s ON, 2.5s OFF for 1,000 cycles	±1%													
Resistance To Soldering Heat	IEC 60115-1 4.18.2 Dip the resistor into a solder bath measured (260±5)°C and hold it for a 10±1 seconds	±1%													
Solderability	IEC 60115-1 4.17.2 Solder area covered after (235±3)°C/(2±0.2) seconds with flux applied	95% Min.													
Vibration	IEC 60015-1 4.22 Six hours in each parallel and axial direction with a simple harmonic motion having an amplitude of 0.75mm and 10 to 500 Hz.	±1%													
Thermal Endurance	IEC 60115-1 4.25.3 1000 hours at 150°C without load	±1%													
Thermal Shock	IEC 60115-1 4.19 -55°C 30minutes, +150°C 30minutes, 5 cycles	±2%													
Single pulse high voltage overload	IEC 60115-1 4.27 10 pulses of 10/700µs at 10x rated voltage (not over 2x max. working voltage) with interval of 60 sec.	±1%													
Electrostatic discharge (Human body model)	IEC 60115-1 4.38 3 positive & 3 negative discharges with 4KV source	±1%													
Climatic test	IEC 60115-1 4.23 4.23.2 - dry heat: 16 hours 150°C 4.23.3 - damp heat: 24 hours 55°C with 95% relative humidity 4.23.4 - cold: 2 hours -55°C 4.23.5 - negative air pressure: 2 hour 8.5KPa at (25±10)°C 4.23.6 - damp heat cyclic: 5 days 55°C with 95% relative humidity 4.23.7 - DC load: rated voltage at -55°C and 150°C each 1 Min.	±2%													
Bending test	IEC 60115-1 4.33 Pressing depth 2mm, 3 times	±1%													
Flammability	IEC 60115-1 4.35 Needle flame test 10s	No burning after 30s													
Surge Test	Proprietary test specification FRC-TR-010113 = $\sqrt{(6000 \times P \times R)}$ DC P is power rating, R is resistance value, surge voltage is not more than listed at right Surge spec = 1.2/50µs Period = 12 sec Number of surges = 5	<table border="1"> <tr> <td>SRM204</td> <td>2KV</td> <td rowspan="6">±5%</td> </tr> <tr> <td>SRM204T</td> <td>4KV</td> </tr> <tr> <td>SRM207</td> <td>6KV</td> </tr> <tr> <td>SRM101/207P</td> <td>8KV</td> </tr> <tr> <td>SRM201</td> <td>9KV</td> </tr> <tr> <td>SRM301/101T</td> <td>10KV</td> </tr> </table>	SRM204	2KV	±5%	SRM204T	4KV	SRM207	6KV	SRM101/207P	8KV	SRM201	9KV	SRM301/101T	10KV
SRM204	2KV	±5%													
SRM204T	4KV														
SRM207	6KV														
SRM101/207P	8KV														
SRM201	9KV														
SRM301/101T	10KV														

Quality • Reliability
Cost-Down via Innovation.

■ SINGLE SURGE PERFORMANCE

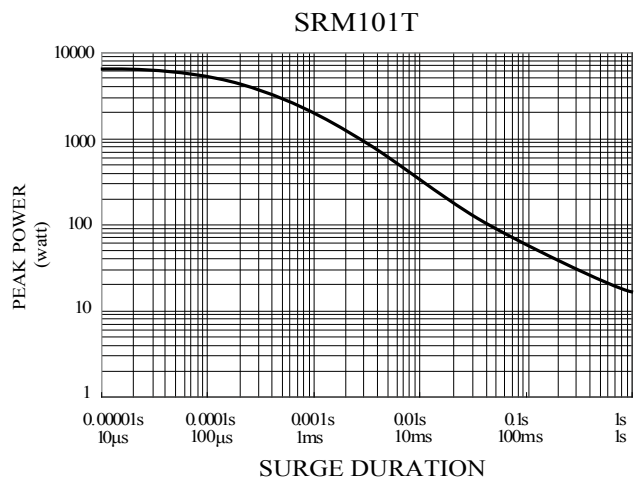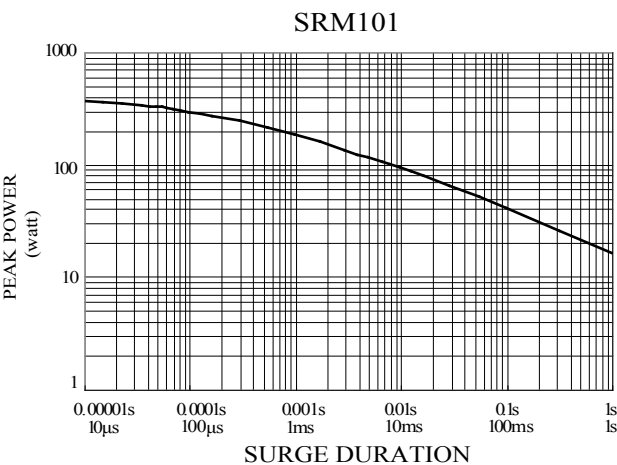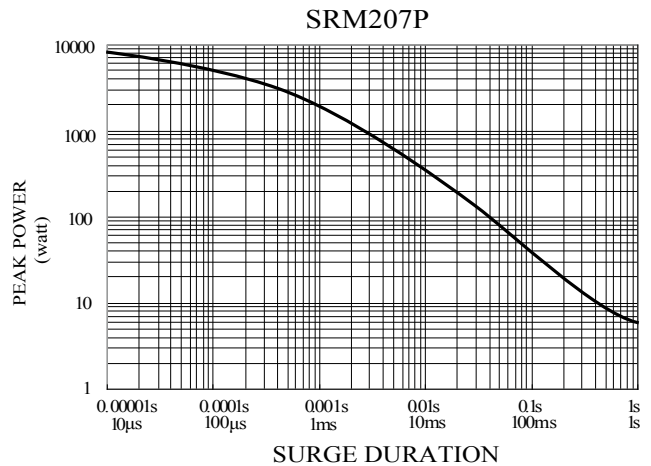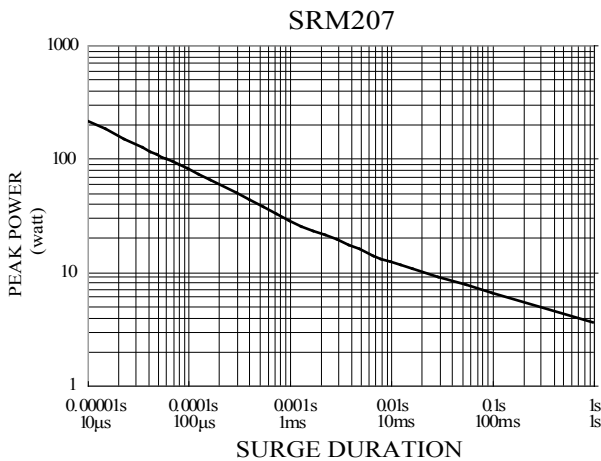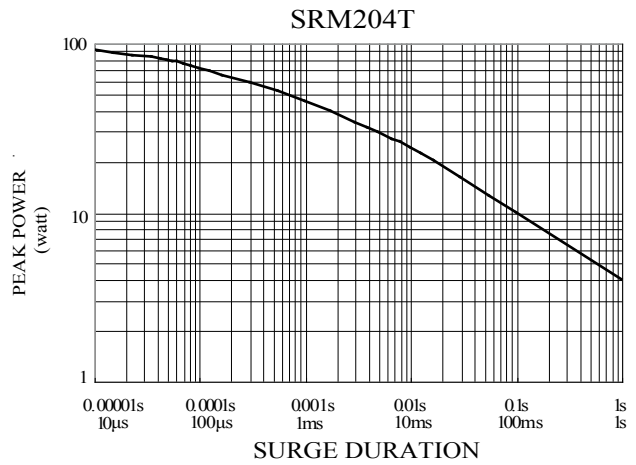
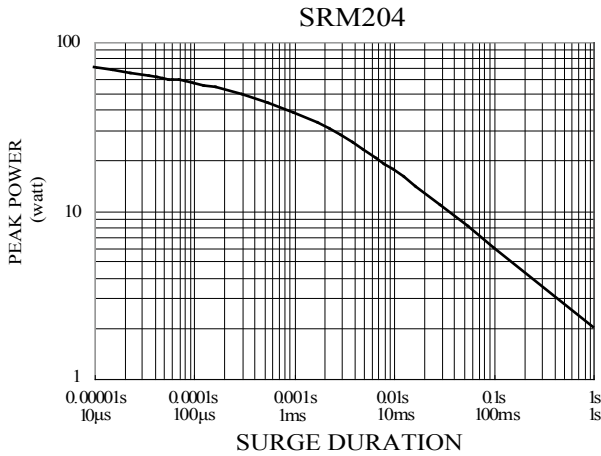


SRM


Quality • Reliability
Cost-Down via Innovation.

SRM

■ SINGLE SURGE PERFORMANCE

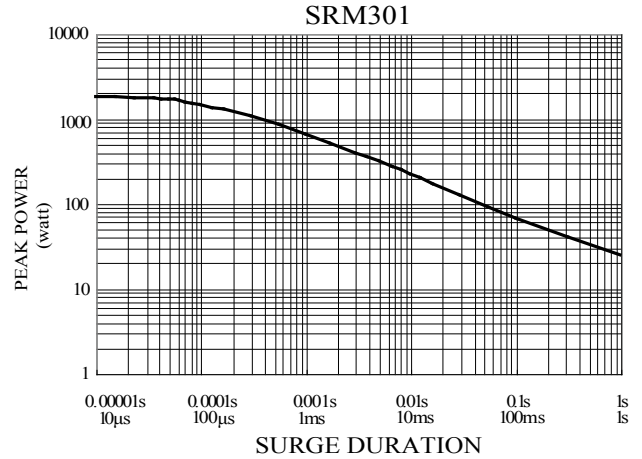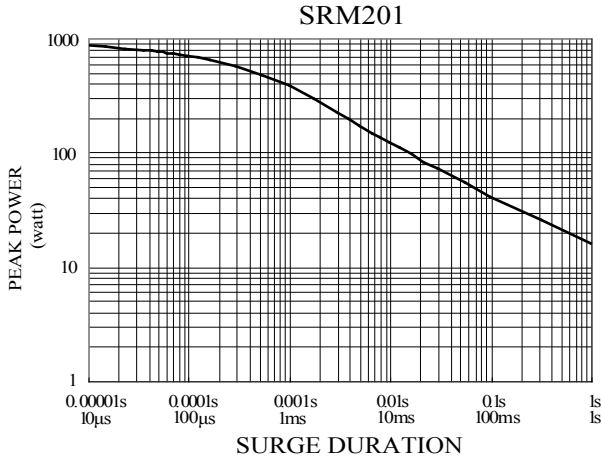

■ SURGE POWER DERATING CURVE

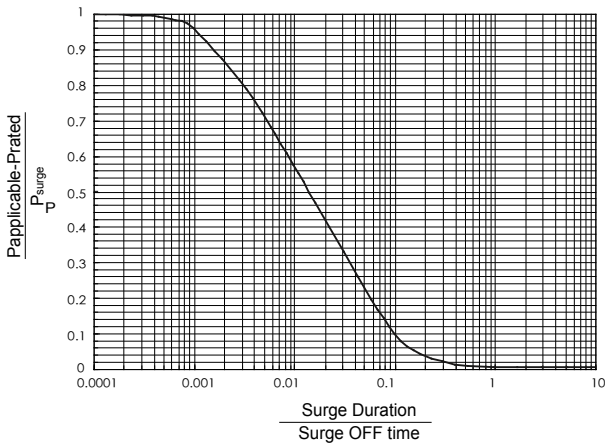


Notes:

- SINGLE SURGE PERFORMANCE graph is good for NON REPETITIVE applications operating in an ambient temperature of 70°C or less. For temperatures above 70°C, the graph power must be derated further linearly down to zero at 150 °C.
- To determine applicable surge power in continuous-surge applications:
 1. Identify allowable duration and peak power P_{surge} of single surge;
 2. Determine ratio of surge duration/surge OFF time in application;
 3. Calculate $P_{applicable}$ backwardly according to Y-axis of SURGE POWER DERATING CURVE.

Quality • Reliability
Cost-Down via Innovation.

SRM

■ SUGGESTED PAD LAYOUT

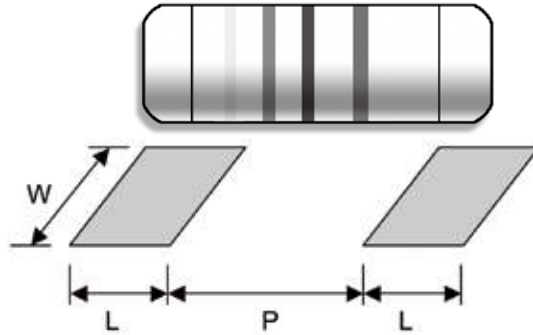

Type	Soldering Mode	Pad Length (L, mm, Min.)	Pad Spacing (P, mm)	Pad Width (W, mm, Min.)
SRM204/SRM204T	Reflow	1.3	1.6 ± 0.1	1.6
	Wave	1.5	1.5 ± 0.1	1.8
SRM207/207P	Reflow	2.0	3.0 ± 0.1	3.0
	Wave	2.5	3.0 ± 0.1	3.0
SRM101/101T	Reflow	2.0	3.0 ± 0.1	3.0
	Wave	2.5	3.0 ± 0.1	3.0
SRM201	Reflow	3.0	4.9 ± 0.3	3.7
	Wave	3.5	4.8 ± 0.3	4.0
SRM301	Reflow	4.0	6.2 ± 0.4	5.0
	Wave	4.5	6.0 ± 0.4	5.0

For better heat dissipation / lower heat resistance, increase W & L.

■ COVER TAPE PEELING SPECIFICATION

Recommended peeling force:

SRM204, SRM204T, SRM207, SRM207P, SRM101, SRM101T: 50±5gf SRM201, SRM301: 70±10gf

