



RD1 Series




ROCKER




Panel Cutout





Terminal Options



4.8mm Tab



Solder

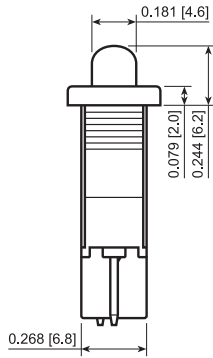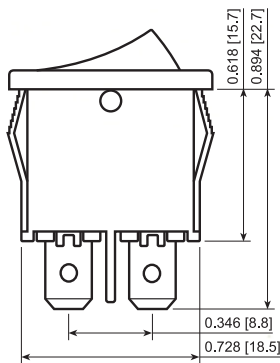

FEATURES:

- Compact Size With High Ratings
- Ideal for Applications With Limited Space

SPECIFICATIONS:

RATING: RATING OPTION C:

- 16A 125VAC [UL, cUL]
- 10A 250VAC [UL, cUL]
- 1/3HP 125/250VAC [UL, cUL]
- 10(4)A 250V~ 1E4 T125 [VDE]
- 10(2)A 250V~ 5E4 T85 [VDE]

RATING OPTION 3:

- 10A 125VAC [UL, cUL]
- 6(2)A 250V~ 1E4 T125 [VDE]

TEMPERATURE: -20°C to 105°C [UL, cUL]
-20°C to 125°C [VDE]

ELECTRICAL LIFE: 10,000 Cycles

CONTACT RESISTANCE: 35mΩ Max.

INSULATION RESISTANCE: 100MΩ Min. at 500VDC

DIELECTRIC STRENGTH: 1,500VAC for 1 Minute

MATERIALS:

- BODY:** Polyamide 6/6, UL94 V-2
- ACTUATOR:** Polyamide 6/6, UL94 V-2
- CONTACTS:** Silver Alloy
- TERMINALS:** Silver Plated Copper



RD11131121



RD11131200



RD111C1900

Series	Terminal	Function	Rating	Body Color	Actuator Color	Marking Color	Marking Type
RD1	1 - 4.8mm Tab 5 - Solder	1 - Off-On 4 - Off-(On)	3 - 10A 125VAC C - 16A 125VAC	1 - Black 2 - White 3 - Almond 4 - Grey 9 - Red	1 - Black 2 - White 3 - Almond 4 - Grey 5 - Orange 7 - Blue 8 - Green 9 - Red	0 - None 1 - Black 2 - White 8 - Red	0 - None 1 - I/O Vert. 3 - ON/OFF Vert. 4 - ON/OFF Horiz.

Custom Colors and Markings Available Upon Request

EXAMPLE PART NUMBERS:

- RD11131100 1P Off-On
Black Body/Actuator, No Marking
- RD11131121 1P Off-On
Black Body/Actuator, I/O Vert.
- RD111C1100 1P Off-On
Black Body/Actuator, No Marking
- RD111C1121 1P Off-On
Black Body/Actuator, I/O Vert.

