# **SERIES RP8100 SWITCHES**

## PUSHBUTTON SWITCHES - ROUND ILLUMINATED



SPECIFICATIONS	
Contact Rating:	125mA @ 125 VAC
	100mA @ 50 VDC
Life Expectancy (Electric	cal): 500,000 cycles at full load
Contact Resistance:	50 m $\Omega$ max (initial)
Insulation Resistance:	1,000 MΩ min. @ 500VDC
Dielectric Strength:	1,000 VAC rms.
Operating Force:	300 gf ±100 gf
Operating Temperature:	-30°C to +85°C
Contact Bounce:	10ms MAX

#### **FEATURES & BENEFITS**


- ► Threaded or snap in panel mount
- ► Extended Operating life-500k cycles ► Audio
- ► LED illuminated option
- ► Sealed to IP67

#### APPLICATIONS/MARKETS

- ► Telecommunications
- ► Appliance
- ► Instrumentation
- ► Consumer Electronics

MATERIALS	
Housing:	Nylon
Button:	Nylon
Terminal Case:	Thermo plastic
Terminals:	Copper alloy, plated
Contact:	Copper alloy, plated

1.5mm

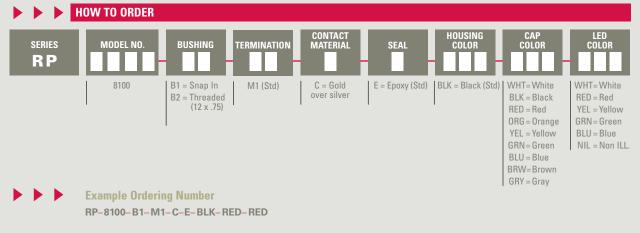

Travel:

Specifications subject to change without notice.

Fax: 763-531-8235

104

Phone: 800-867-2717


Ø 13.60 [.535]


PANEL MOUNTING


## **RP 8100**

## THREADED








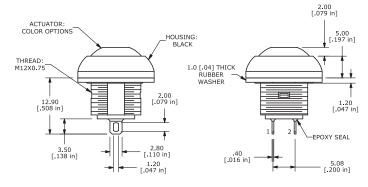


## **RP 8100**

## SNAP-IN





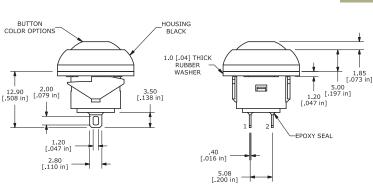


# **SERIES RP8100 SWITCHES**


## PUSHBUTTON SWITCHES - ILLUMINATED


## **RP 8100**

LED THREADED








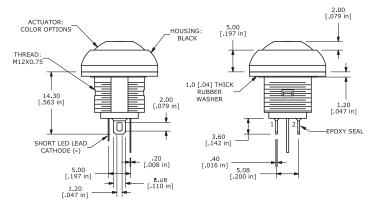



## **RP 8100**

LED SNAP-IN







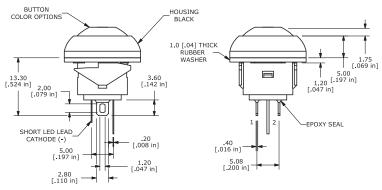

Phone: 800-867-2717