


Circuit Configuration



Dimensions mm (inches)

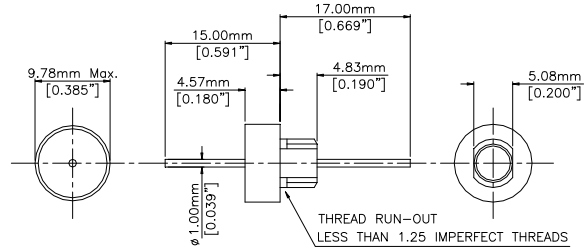

¼-28 UNF Class 2A Thread

Electrical Details

Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	15A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable

Mechanical Details

Head Diameter	9.8mm (0.386")
Nut A/F	7.92mm (0.312")
Washer Diameter	11.35mm (0.447")
Mounting Torque	0.9Nm (7.97lbf in) max.
Mounting Hole Diameter	6.7mm O.D., 5.3mm A/F (0.264" O.D., 0.217" A/F)
Max. Panel Thickness	2.3mm (0.091")
Weight (Typical)	3.0g (0.11oz)
Finish ** (see notes below)	Silver plate on copper undercoat

Product Code	Hardware (Nuts & Washers etc.)	Capacitance ±20%	Dielectric	Rated Voltage (dc)	DWW (dc)	Typical No-Load Insertion Loss (db)					
						0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
SFJGC3K00101MC	0 = No hardware supplied 1 = supplied with standard nut and wavy washer Other options available – please contact factory	100pF	COG	3kV*	3.75kV					4	22
SFJGC3K00151MC		150pF	COG	3kV*	3.75kV					7	25
SFJGC3K00221MC		220pF	COG	3kV*	3.75kV					10	29
SFJGC2K00331MC		330pF	COG	2kV*	2.5kV					13	33
SFJGC2K00471MC		470pF	COG	2kV*	2.5kV				1	16	35
SFJGC2K00681MC		680pF	COG	2kV*	2.5kV				2	19	39
SFJGC2K00102MC		1.0nF	COG	2kV*	2.5kV				4	23	41
SFJGC2K00152MX		1.5nF	X7R	2kV*	2.5kV				7	26	45
SFJGC2K00222MX		2.2nF	X7R	2kV*	2.5kV				10	30	50
SFJGC2K00332MX		3.3nF	X7R	2kV*	2.5kV				13	33	52
SFJGC2K00472MX		4.7nF	X7R	2kV*	2.5kV				1	16	36
SFJGC2K00682MX		6.8nF	X7R	2kV*	2.5kV				2	19	39
SFJGC2K00103MX		10nF	X7R	2kV*	2.5kV				4	22	41
SFJGC1K00153MX		15nF	X7R	1kV*	1.5kV				7	25	44
SFJGC1K00223MX		22nF	X7R	1kV*	1.5kV				10	29	46
SFJGC1K00333MX		33nF	X7R	1kV*	1.5kV				13	33	48
SFJGC1K00473MX		47nF	X7R	1kV*	1.5kV				1	16	35
SFJGC1K00683MX		68nF	X7R	1kV*	1.5kV				2	19	39
SFJGC5000104MX		100nF	X7R	500*	750				4	22	41
SFJGC5000154MX		150nF	X7R	500*	750				7	25	45
SFJGC5000224MX		220nF	X7R	500*	750				10	29	49
SFJGC5000334MX		330nF	X7R	500*	750				13	33	52
SFJGC5000474MX		470nF	X7R	500	750				1	16	35
SFJGC3000684MX		680nF	X7R	300	600				2	19	38
SFJGC2000105MX		1.0µF	X7R	200	500				4	22	41
SFJGC1000155MX		1.5µF	X7R	100	250				7	25	45
SFJGC1000225MX		2.2µF	X7R	100	250				10	29	48
SFJGC0500335MX		3.3µF	X7R	50	125				14	34	52

* - Also rated for operation at 115Vac 400Hz. Self heating will occur – evaluation in situ recommended

Ordering Information Note: Ordering code can have up to 4 additional digits on the end to denote special requirements

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Hardware
SF	J	G	C	050	0335	M	X	O
Syfer Filter	9.78mm Maximum Diameter	¼-28 UNF 5.08mm A/F	C = C Filter	050 = 50V 100 = 100V 200 = 200V 300 = 300V 500 = 500V 1K0 = 1kV 2K0 = 2kV 3K0 = 3kV	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF 0332 = 3.3µF	M = ±20%	C = COG/NPO X = X7R	1 = Nut & Wavy Washer 3 = Nut & Toothed Lockwasher

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

** Standard Option 90Sn/10Pb plating finish on all metalwork (body, pin, nut and wavy washer) specified by suffix code /0100

Please refer specific requests to the factory.