

Aluminum Capacitors, Power General Purpose Screw Terminals

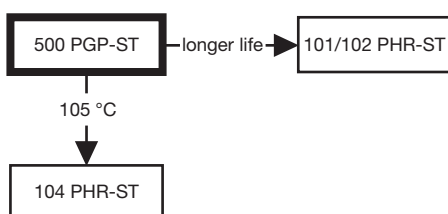


Fig. 1

QUICK REFERENCE DATA

DESCRIPTION	VALUE
	500
Nominal case size (Ø D x L in mm)	50 x 80 to 90 x 220
Rated capacitance range, C _R	1000 µF to 15 000 µF
Tolerance on C _R	± 20 %
Rated voltage range, U _R	400 V to 450 V
Category temperature range	- 40 °C to + 85 °C
Endurance test at 85 °C	2000 h
Useful life at 85 °C	2000 h
Shelf life at 0 V, 85 °C	500 h
Based on sectional specification	IEC 60384-4/EN 130300
Climatic category IEC 60068	40/085/56

SELECTION CHART FOR C_R, U_R AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm)

C _R (µF)	U _R (V)		
	400	420	450
1000	50 x 80	50 x 80	50 x 80
1200	50 x 80	50 x 80	50 x 80
1500	50 x 105	50 x 105	50 x 105
1800	50 x 105	50 x 105	50 x 105
2200	50 x 105 65 x 105	65 x 105	65 x 105
2700	65 x 105	65 x 105	65 x 105
3300	65 x 105	65 x 105	76 x 105
3900	65 x 105	76 x 105	76 x 105
4700	76 x 105	76 x 114	76 x 114
5600	76 x 114	-	76 x 146
6800	76 x 146	76 x 146	90 x 146
8200	90 x 146	90 x 146	76 x 220
10 000	76 x 220 90 x 146	76 x 220	76 x 220
12 000	76 x 220	-	90 x 220
15 000	90 x 220	90 x 220	-

FEATURES

- Useful life: 2000 h at + 85 °C
- Efficient design
- Available in case sizes up to Ø 90 mm x 220 mm
- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, cylindrical aluminum case, insulated with a blue sleeve
- Pressure relief in the sealing disc
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


RoHS
COMPLIANT

APPLICATIONS

- UPS
- Energy storage in medical or industrial pulse systems

MARKING

The capacitors are marked with the following information:

- Rated capacitance (in µF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for ± 20 %)
- Rated voltage (in V)
- Date code
- Name of manufacturer
- Code for factory of origin
- Code number

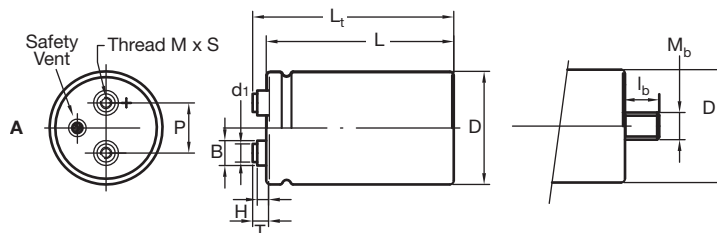
DIMENSIONS in millimeters **AND AVAILABLE FORMS**


Fig. 2 A: Standard M5 disc: Screw Terminal (ST) and Screw Terminal Bolt nut (STB)

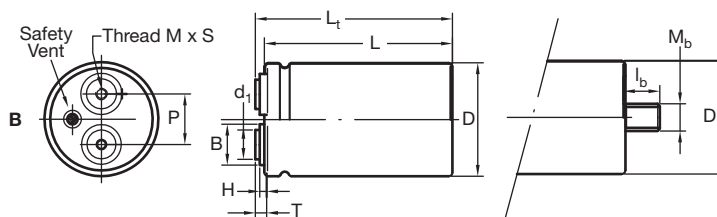


Fig. 2 B: High current M6 disc: Screw Terminal (ST) and Screw Terminal Bolt nut (STB)

Notes

- Maximum permissible torque which may be applied to the termination screws: 2 Nm for M5; 2.5 Nm for M6
For accessories refer to document "Mounting Accessories", see www.vishay.com/doc?28348
The capacitors are delivered with screws and washers.
- High current disc with 1/4 28 UNF (US) thread is available on request.

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES														
DESIGN	DRAWING	$L \pm 1$	$L_t \pm 1$	$D \pm 1$	$P \pm 0.3$	$T \pm 0.2$	$H \pm 0.3$	$B \pm 0.3$	$D_1 \pm 0.1$	M	S - 0	M_b	$l_b \pm 0.1$	MASS (g)
50 x 80	2A	82.8	88.8	51.0	22.2	7.1	4.8	11.0	7.9	M5	9.5	M12	16.0	200
50 x 105	2A	104.8	110.8	51.0	22.2	7.1	4.8	11.0	7.9	M5	9.5	M12	16.0	300
65 x 105	2A	104.8	110.7	65.0	28.5	7.0	4.6	11.9	7.9	M5	9.5	M12	16.0	480
65 x 105 HC	2B	104.8	109.2	65.0	28.5	5.5	3.5	18.0	13.0	M6	8.5	M12	16.0	480
76 x 105	2A	105.8	111.7	76.4	31.8	7.0	4.6	11.7	7.9	M5	9.5	M12	16.0	700
76 x 105 HC	2B	105.8	110.2	76.4	31.8	5.5	3.5	18.3	13.0	M6	8.5	M12	16.0	700
76 x 114	2A	115.8	121.7	76.4	31.8	7.0	4.6	11.7	7.9	M5	9.5	M12	16.0	800
76 x 114 HC	2B	115.8	120.2	76.4	31.8	5.5	3.5	18.3	13.0	M6	8.5	M12	16.0	800
76 x 146	2A	145.8	151.7	76.4	31.8	7.0	4.6	11.7	7.9	M5	9.5	M12	16.0	1000
76 x 146 HC	2B	145.8	150.2	76.4	31.8	5.5	3.5	18.3	13.0	M6	8.5	M12	16.0	1000
76 x 220	2A	219.8	225.7	76.4	31.8	7.0	4.6	11.7	7.9	M5	9.5	M12	16.0	1500
76 x 220 HC	2B	219.8	224.2	76.4	31.8	5.5	3.5	18.3	13.0	M6	8.5	M12	16.0	1500
90 x 146 HC	2B	150.1	155.4	89.4	31.8	7.9	0.0	13.0	13.0	M6	10.0	M12	16.0	1300
90 x 220 HC	2B	218.1	223.4	89.4	31.8	7.9	0.0	13.0	13.0	M6	10.0	M12	16.0	2000

Note

- For bolt version holds:
 $L = L_{\text{standard}} - 0.5 \text{ mm}$
 $L_t = L_{t \text{ standard}} - 0.5 \text{ mm}$

**DIMENSIONS** in millimeters, **MASS AND PACKAGING QUANTITIES**

DESIGN	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS L x W x H (mm)
50 x 80	25	377 x 375 x 123
50 x 105	25	377 x 375 x 129
65 x 105	16	377 x 375 x 129
65 x 105 HC	16	377 x 375 x 129
76 x 105	12	377 x 375 x 129
76 x 105 HC	12	377 x 375 x 129
76 x 114	12	377 x 375 x 140
76 x 114 HC	12	377 x 375 x 140
76 x 146	12	377 x 375 x 168
76 x 146 HC	12	377 x 375 x 168
76 x 220	18	520 x 270 x 280
76 x 220 HC	18	520 x 270 x 280
90 x 146 HC	10	520 x 270 x 190
90 x 220 HC	10	520 x 270 x 280

Note

- For bolt version holds:
H of cardboard box: + 10 mm

ELECTRICAL DATA

SYMBOL	DESCRIPTION
C_R	Rated capacitance at 100 Hz, tolerance $\pm 20\%$
I_R	Rated RMS ripple current at 100 Hz, 85 °C
I_{L5}	Max. leakage current after 5 min at U_R
ESR	Max. equivalent series resistance at 100 Hz
Z	Max. impedance at 10 kHz

Note

- Unless otherwise specified, all electrical values in tables 2 and 3 apply at $T_{amb} = 20\text{ °C}$, $P = 86\text{ kPa}$ to 106 kPa , $RH = 45\%$ to 75%

ORDERING EXAMPLE

Electrolytic capacitor 500 series

4700 μF /400 V; $\pm 20\%$

Nominal case size: $\varnothing 76\text{ mm} \times 105\text{ mm}$;

STB version; high post M5 disc

Ordering code: MAL2 500 56472 E3

Former 12NC: 2222 500 56472



Table 2

ELECTRICAL DATA AND ORDERING INFORMATION											
U _R (V)	C _R 100 Hz (μF)	NOMINAL CASE SIZE Ø D X L (MM)	I _R 120 Hz 85 °C (A)	I _R 120 Hz 40 °C (A)	I _{L5} 5 min (mA)	ESR MAX. 120 Hz (mΩ)	Z MAX. 10 kHz (mΩ)	HIGH POST M5 DISC		HIGH CURRENT M6 DISC	
								ORDERING CODE ST MAL2500.....	ORDERING CODE STB MAL2500.....	ORDERING CODE ST MAL2500.....	ORDERING CODE STB MAL2500.....
400	1000	50 x 80	4.2	11.2	0.80	125	98	26102E3	66102E3	-	-
	1200	50 x 80	4.5	12.0	0.96	107	85	16122E3	56122E3	-	-
	1500	50 x 105	5.1	14.1	1.20	86	68	16152E3	56152E3	-	-
	1800	50 x 105	5.6	15.1	1.44	73	59	16182E3	56182E3	-	-
	2200	50 x 105	6.3	17.1	1.76	58	46	16222E3	56222E3	-	-
	2200	65 x 105	7.4	19.9	1.76	58	46	26222E3	66222E3	46222E3	86222E3
	2700	65 x 105	7.9	21.5	2.16	49	39	16272E3	56272E3	36272E3	76272E3
	3300	65 x 105	8.9	24.0	2.64	39	31	16332E3	56332E3	36332E3	76332E3
	3900	65 x 105	9.4	25.5	3.12	34	28	16392E3	56392E3	36392E3	76392E3
	4700	76 x 105	11.1	30.0	3.76	30	25	16472E3	56472E3	36472E3	76472E3
	5600	76 x 114	12.1	32.6	4.48	26	21	16562E3	56562E3	36562E3	76562E3
	6800	76 x 146	13.6	36.6	5.44	21	18	16682E3	56682E3	36682E3	76682E3
	8200	90 x 146	17.7	47.7	6.56	16	13	-	-	36822E3	76822E3
	10 000	76 x 220	17.0	45.8	8.00	15	12	16103E3	56103E3	36103E3	76103E3
	10 000	90 x 146	19.3	52.2	8.00	13	11	-	-	46103E3	86103E3
	12 000	76 x 220	17.8	48.1	9.60	13	11	16123E3	56123E3	36123E3	76123E3
	15 000	90 x 220	23.6	63.7	12.00	9	8	-	-	36153E3	76153E3
420	1000	50 x 80	4.3	11.5	0.84	105	74	14102E3	54102E3	-	-
	1200	50 x 80	4.6	12.4	1.01	90	65	14122E3	54122E3	-	-
	1500	50 x 105	5.3	14.4	1.26	72	52	14152E3	54152E3	-	-
	1800	50 x 105	5.7	15.3	1.52	62	46	14182E3	54182E3	-	-
	2200	65 x 105	7.5	20.4	1.85	49	35	14222E3	54222E3	34222E3	74222E3
	2700	65 x 105	8.1	21.9	2.27	42	31	14272E3	54272E3	34272E3	74272E3
	3300	65 x 105	9.1	24.6	2.78	33	24	14332E3	54332E3	34332E3	74332E3
	3900	76 x 105	10.7	28.8	3.28	29	22	14392E3	54392E3	34392E3	74392E3
	4700	76 x 114	11.7	31.5	3.95	25	19	14472E3	54472E3	34472E3	74472E3
	6800	76 x 146	13.8	37.2	5.72	18	14	14682E3	54682E3	34682E3	74682E3
	8200	90 x 146	17.6	47.6	6.89	14	10	-	-	34822E3	74822E3
	10 000	76 x 220	17.3	46.6	8.40	13	10	14103E3	54103E3	34103E3	74103E3
	15 000	90 x 220	24.1	65.0	12.60	8	6	-	-	34153E3	74153E3
450	1000	50 x 80	4.2	11.3	0.90	126	88	17102E3	57102E3	-	-
	1200	50 x 80	4.5	12.1	1.08	100	76	17122E3	57122E3	-	-
	1500	50 x 105	5.3	14.2	1.35	79	61	17152E3	57152E3	-	-
	1800	50 x 105	5.9	15.9	1.62	64	48	17182E3	57182E3	-	-
	2200	65 x 105	7.4	20.0	1.98	54	41	17222E3	57222E3	37222E3	77222E3
	2700	65 x 105	8.3	22.5	2.43	43	33	17272E3	57272E3	37272E3	77272E3
	3300	76 x 105	9.9	26.8	2.97	37	28	17332E3	57332E3	37332E3	77332E3
	3900	76 x 105	10.5	28.4	3.51	32	25	17392E3	57392E3	37392E3	77392E3
	4700	76 x 114	11.5	31.0	4.23	28	22	17472E3	57472E3	37472E3	77472E3
	5600	76 x 146	12.8	34.6	5.04	23	18	17562E3	57562E3	37562E3	77562E3
	6800	90 x 146	16.6	44.8	6.12	17	13	-	-	37682E3	77682E3
	8200	76 x 220	16.0	43.3	7.38	16	13	17822E3	57822E3	37822E3	77822E3
	10 000	76 x 220	17.0	45.8	9.00	14	11	17103E3	57103E3	37103E3	77103E3
	12 000	90 x 220	22.1	59.5	10.80	10	8	-	-	37123E3	77123E3

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	≥ 400 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1$ V
Current		
Leakage current	After 1 min at U_R	$I_{L1} \leq 0.006 C_R \times U_R + 4 \mu A$
	After 5 min at U_R	$I_{L5} \leq 0.002 C_R \times U_R + 4 \mu A$
Inductance		
Equivalent series inductance (ESL)	Case $\varnothing$ D = 50 mm	Typ. 16 nH
	Case $\varnothing$ D = 65 mm	Typ. 19 nH
	Case $\varnothing$ D = 76 mm	Typ. 20 nH
	Case $\varnothing$ D = 90 mm	Typ. 20 nH

Table 3

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY	
FREQUENCY (Hz)	I_R MULTIPLIER
	500
60	0.70
100	0.95
120	1.00
500	1.20
1000	1.30
$\geq 10\,000$	1.40

Table 4

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF TEMPERATURE	
TEMPERATURE (°C)	I_R MULTIPLIER
40	2.7
60	2.0
70	1.7
85	1.0

Table 5

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/EN130300 subclause 4.13	$T_{amb} = 85$ °C; U_R applied; 2000 h	$\Delta C/C: \pm 10$ % $ESR \leq 1.3 \times$ spec. limit $Z \leq 2 \times$ spec. limit $I_{L5} \leq$ spec. limit
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85$ °C; U_R and I_R applied; 2000 h	$\Delta C/C: \pm 30$ % $ESR \leq 3 \times$ spec. limit $Z \leq 3 \times$ spec. limit $I_{L5} \leq$ spec. limit no short or open circuit, no visible damage total failure percentage: ≤ 3 %
Shelf life (storage at high temperature)	IEC 60384-4/EN130300 subclause 4.17	$T_{amb} = 85$ °C; no voltage applied; 500 h after test: U_R to be applied for 30 min, 24 h to 48 h before measurement	$\Delta C/C: \pm 10$ % $ESR \leq 1.2 \times$ spec. limit $I_{L5} \leq 2 \times$ spec. limit



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.